



Bose 151 Tower Brackets Installation Instructions and Owners Manual

Monster Tower, LLC
3575 Trotters Drive, Bldg A
Alpharetta, GA 30004

Phone: 877-77-Tower or 770-410-3451
Fax: 877-232-6538 or 770-234-3833
www.MonsterTower.com
Support@MonsterTower.com

THANK YOU FOR YOUR BUSINESS. IF YOU ARE NOT COMPLETELY SATISFIED IN ANY WAY WITH YOUR NEW BRACKETS, PLEASE CONTACT US. Our entire purpose as a company is to offer great products at affordable prices that our customers love.

Please take a few minutes to read the installation instructions and become familiar with the speaker and installation before beginning to ensure a high quality, trouble free installation and use. If you have any questions during your installation give us a call at 877-77-Tower or e-mail Support@MonsterTower.com

NOTES ON INSTALLING AND USING YOUR NEW SPEAKER BRACKETS

- Loctite or equivalent thread locker is recommended for all threads
- Regularly check all hardware to make sure it is tight
- Although the speakers are weather resistant and designed for outdoor use, do not spray directly into the grill with high pressure water

Bose 151 Speaker Parts List

Item	Qty	Description
1	2	Tower Collar Bracket & Hardware
2	4	Plastic Collar Inserts
3	2	M8x35 Cap Screws & Washer
4	2	Bose 151 Speakers (customer supplied)

Assembly Instructions


STEP 1: Carefully pry the speaker cover off the Bose 151 Speakers



STEP 2: Remove the FRONT threaded insert. Insert the Bose supplied screw (or a Phillips screwdriver) into the front threads, shown removed below, and use a hammer or similar device to tap out the threaded insert, shown sitting on top of the speaker next to the FRONT hole after it was removed.



STEP 3: Remove the speaker by taking out the three screws holding it. At this point the top (front) hole will have the threaded insert ready to be removed, if it didn't drop into the speaker, in which case - hunt it down and eradicate it.

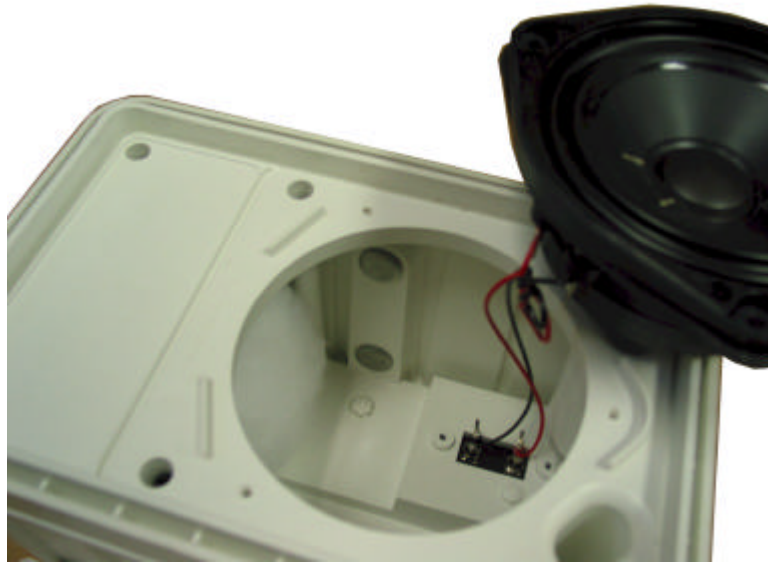

STEP 4: Insert the M8 Bolt and washer through the hole from the removed threaded insert and into the Collar Bracket and we recommend using Loctite or similar thread locker on the M8 bolt. Tighten "real good" or to 10 ft-lbs. Screw the speaker back in and replace the cover so the logo is at the bottom. The back of the speaker will be upside down because the threaded inserts are on the bottom of the speaker but when you half way through a backroll or trantrum or similar inverted move, they will look just right!



STEP 5: Attach the Collar Bracket to the tower as shown using the Collar Inserts that match your size tower (2-1/2" are provided for Monster Towers and a universal kit with 1-1/2", 1-5/8", 1-3/4", 1-7/8", 2" and 2-1/4" are provided for other towers).



STEP 6: Wire it up and fire it up

Monster Tower, LLC Warranty

Monster Tower warrants this product against manufacturers defects for a period of five (5) years. Anodized surfaces are specifically excluded, as their care and use cannot be controlled by the manufacturer. Any modifications or improper use, not approved in writing by Monster Tower, shall void this warranty. Monster Tower is not responsible for personal injury or damage to the boat caused by the use of this product. Monster Tower's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. If you need to make a warranty claim contact Monster Tower at 877-77-Tower to receive a return authorization number which is required for all claims. Defects must be reported within 30 days of discovery.