



WakeTunes ProAudio Speakers Instructions and Owners Manual

Monster Tower, LLC
3575 Trotters Drive, Bldg A
Alpharetta, GA 30004

Phone: 877-77-Tower or 770-410-3451
Fax: 877-232-6538 or 770-234-3833
www.MonsterTower.com
Support@MonsterTower.com

THANK YOU FOR YOUR BUSINESS. IF YOU ARE NOT COMPLETELY SATISFIED IN ANY WAY WITH YOUR NEW SPEAKERS, PLEASE CONTACT US. Our entire purpose as a company is to offer great products at affordable prices that our customers love.


Please take a few minutes to read the installation instructions and become familiar with the speaker and installation before beginning to ensure a high quality, trouble free installation and use. If you have any questions during your installation give us a call at 877-77-Tower or e-mail Support@MonsterTower.com

NOTES ON INSTALLING AND USING YOUR NEW WAKETUNES SPEAKERS

- **TOOLS:** A 6 mm Allen wrench and torque wrench are required for installation
- Loctite or equivalent thread locker is recommended for Item 7
- For best performance, provide 150 to 200W-RMS at 4 Ohm to each speaker
- Regularly check all hardware to make sure it is tight
- Although the speakers are weather resistant and designed for outdoors use, do not spray directly into the grill with high-pressure water
- Speakers can be painted by scuffing the surface with a Scotch bright pad and using catalyzed enamel automotive paint. Remove grill and tape speakers for painting

Waketunes ProAudio Speaker Parts List and Assembly Diagrams

<i>Item</i>	<i>Qty</i>	<i>Description</i>
1	2	Evid 6.2 Speakers (customer supplied)
2	2	Evid 6.2 Terminal Covers (option, customer supplied)
3	2	Tower Collar Brackets & Hardware
4	4	Plastic Collar Inserts (two pair)
5	2	Adapter Washer
6	2	Backing Plate
7	2	M8 x 50 Bolt with Two washers

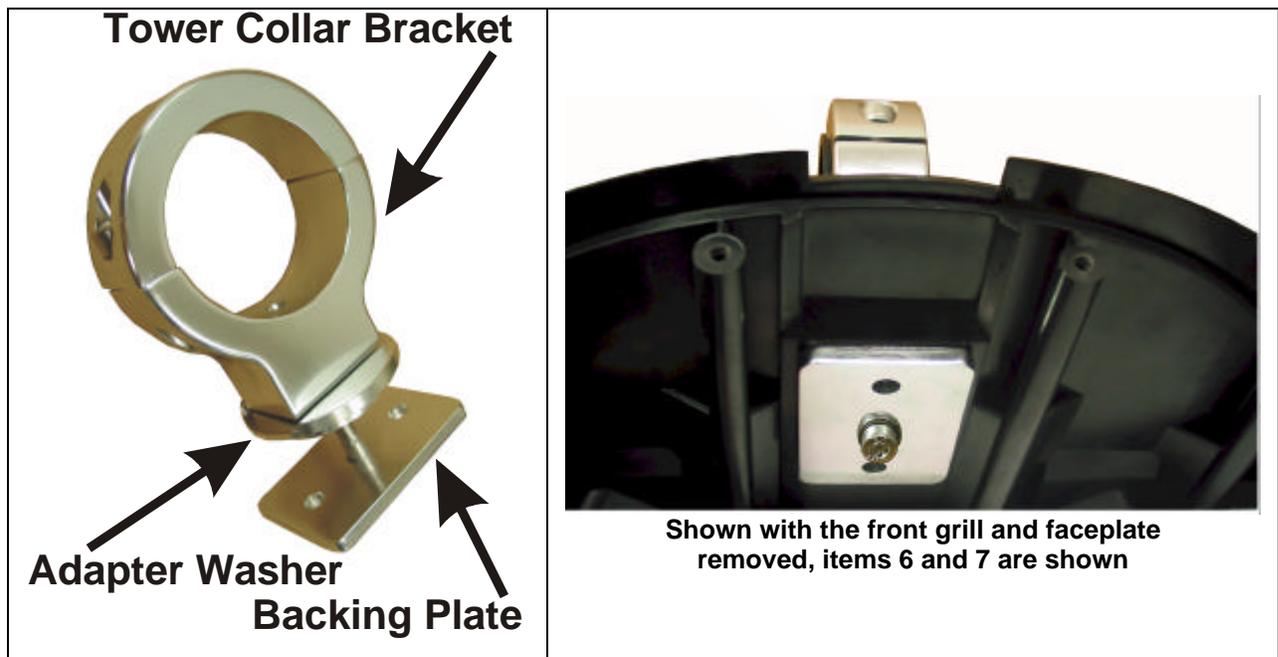

STEP 1: Determine if you are going to access the speaker from the front as shown above or by removing the wiring terminal on the back of the speaker shown below. It is much easier to remove the Rear Terminal Cover but it is more difficult to work from that access port.



STEP 2: Once you have access to the inside of the speaker remove the bolt on the inside that is holding the treaded insert. This threaded insert is shown on the top of the speaker in the above photo. Note that for the other speaker you will remove the treaded insert on the opposite side.

STEP 3: Insert the Adapter Washer into the round recess on the top of the washer. Next, add the Tower Collar to the Adapter Washer. Put the M8x50 Bolt WITH LOCTITE through the Backing Plate. Run the Bolt and backing plate into the Tower Collar from inside the speaker and tighten by hand. **IMPORTANT** - Make sure the Backing Plate is oriented as shown above.

STEP 4: Torque the M8x50 Bolt to 10 ft-lbs

STEP 5: Close the speaker back up by reversing what you did in Step 1

STEP 6: IMPORTANT NOTE: Repeat for the other speaker but on the opposite side if you want the Terminal Covers facing opposite directions as show below. This is our preference but you can have both facing the same way if you prefer.



Note the Terminal Covers are facing opposite directions. They can be mounted to face the same direction as this is only a customer preference.



The above pictures show the speakers with the Tower Collars installed.

Attaching to the Tower

The rear side of the speaker with the connector should normally go towards the outside of the boat as shown below. Attach the Collar Bracket to the tower using M8x25 bolts and the Collar Inserts that matches your size tower (2-1/2" are provided for Monster Towers and a universal kit with 1-1/2", 1-5/8", 1-3/4", 1-7/8", 2" and 2-1/4" are provided for other towers). Install the large EV logo cap to the underside of the speaker to cover the lower mounting area.



A small amount of rotation of the speaker is available to point the speaker towards the outside of the wake. This should be set once and not continually moved or you may need to retighten the M8x50 bolt inside the speaker.

Monster Tower, LLC Warranty for WakeTunes Products

Monster Tower warrants these brackets against manufacturers defects for a period of five (5) years. Anodized surfaces are specifically excluded, as their care and use cannot be controlled by the manufacturer. Any modifications or improper use, not approved in writing by Monster Tower, shall void this warranty. Monster Tower is not responsible for personal injury or damage to the boat caused by the use of this product. Monster Tower's obligation under this warranty shall not include any transportation charges or costs of installation or any liability for direct, indirect or consequential damages resulting from delay or improper installation. Your time would be better spent wakeboarding than reading warranty info. If you need to make a warranty claim contact Monster Tower at 877-77-Tower to receive a return authorization, number which is required for all claims. Defects must be reported within 30 days of discovery.